	ITTC – Recommended Procedures and Guidelines	7.5-01 -01-01 Page 1 of 9	
	Ship Models	Effective Date 2017	Revision 04

ITTC Quality System Manual

Recommended Procedures and Guidelines

Procedure

Ship Models

7.5	Process Control
7.5-01	Test Preparation
7.5-01-01	Ship Models
7.5-01-01-01	Ship Models

Disclaimer

All the information in ITTC Recommended Procedures and Guidelines is published in good faith. Neither ITTC nor committee members provide any warranties about the completeness, reliability, accuracy or otherwise of this information. Given the technical evolution, the ITTC Recommended Procedures and Guidelines are checked regularly by the relevant committee and updated when necessary. It is therefore important to always use the latest version.

Any action you take upon the information you find in the ITTC Recommended Procedures and Guidelines is strictly at your own responsibility. Neither ITTC nor committee members shall be liable for any losses and/or damages whatsoever in connection with the use of information available in the ITTC Recommended Procedures and Guidelines.

Updated / Edited by	Approved
Resistance Committee of the 28 th ITTC	28 th ITTC 2017
Date 03/2017	Date 09/2017



	ITTC – Recommended Procedures and Guidelines	7.5-01 -01-01 Page 2 of 9	
	Ship Models	Effective Date 2017	Revision 04

Table of Contents

1. PURPOSE OF PROCEDURE.....3	
2. PARAMETERS3	3.2.1 Hull.....5 3.2.2 Appendages7 3.2.3 Propeller8
2.1 Definition of Variables3	3.3 Preparation for Model Testing.....8
3. DESCRIPTION OF PROCEDURE3	3.3.1 Ballasting and trimming (for resistance and self-propulsion tests)8 3.3.2 Wax models.....9
3.1 Model Manufacture.....3	3.4 Documentation.....9
3.1.1 Hull model.....3 3.1.2 Propeller model5 3.1.3 Appendages5	4. REFERENCES9
3.2 Turbulence Stimulation5	

	ITTC – Recommended Procedures and Guidelines	7.5-01 -01-01 Page 3 of 9	
	Ship Models	Effective Date 2017	Revision 04

Ship Models

1. PURPOSE OF PROCEDURE

The purpose of the procedure is to ensure the correct manufacture and preparation of hull and propeller models for Resistance (including High Speed Marine Vehicle Resistance), Propulsion and Propeller Open Water Tests.

The tolerances of propeller models for manoeuvring, sea keeping and ice tests can generally be larger (typically 1.5 to 2 times) than those used for propulsion or open water tests whilst those for cavitation tests may be smaller.

2. PARAMETERS

2.1 Definition of Variables

A_E	Expanded blade area (m ²)
A_0	Propeller disk area (m ²)
A_E/A_0	Expanded blade area ratio
AP	After perpendicular
B	Breadth (m)
c	Chord length (m)
D	Propeller diameter (m)
D_h	Boss or hub diameter (m)
FP	Forward perpendicular
P	Propeller pitch (m)
L_{PP}	Length between perpendiculars (m)
L_{WL}	Length of waterline (X) (m)
T	Draught (m)
t	Blade section thickness (m)
x, y, z	Coordinate directions
Δ_m	Displacement mass (kg)

3. DESCRIPTION OF PROCEDURE

3.1 Model Manufacture

3.1.1 Hull model

General

The basic requirement is that the model should be geometrically similar to the ship wherever it is in contact with the water. This may not be possible in all cases owing to different systems and materials of construction on model scale and full size and it is desirable that any departures from similarity should be known and documented.

Materials and construction


Materials used for ship hull models include wax, wood, high-density closed cell foam and fibre reinforced plastic (FRP).

Models are normally cut from a lines plan re-drawn from the ship plan, or from a numerical definition of the hull surface stored electronically in an appropriate graphical format (e.g. IGES file or similar).

Materials such as nylon produced by rapid prototyping (including Selective Laser Sintering, SLS) are not suitable for models of propeller/rotors or other appendages that are required to remain rigid when under test conditions (Liu et al. 2015).

After cutting, the model is finished by hand. In the case of FRP construction, a foam or wooden plug of the model will be manufactured in a similar manner.

Surface finish

	ITTC – Recommended Procedures and Guidelines	7.5-01 -01-01 Page 4 of 9	
	Ship Models	Effective Date 2017	Revision 04

The model surface should be homogeneously smooth and equivalent to that achieved with a 300 to 400 grit wet and dry paper.

Particular care should be taken when finishing the model to ensure that geometric features such as knuckles, spray rails, chines and boundaries of transom sterns remain well-defined (i.e. sharp edges), especially where flow separation is to be expected.

In general, the surface finish of items produced using rapid prototyping techniques does not meet the surface finish requirement, thus further attention may be required.

A review of model surface roughness, including items produced using rapid prototyping techniques, is given in Resistance Committee report for the 28th ITTC (2017).

Stations and waterlines

The spacing and numbering of displacement stations and waterlines should be properly defined. Displacement *sections* may be identified as follows:

- A ten section system numbering from aft with station 0 at the *AP*. The number of stations can also be 21 (20 equally sized intervals). The stations are counted from aft.
- Decimal fraction stations may be introduced at the ends as required (such as 9.5, 9.6, 9.7 etc.).
- Stations aft of the *AP* to be numbered negatively.
- Stations forward of the *FP* to be numbered positively in natural succession (10.1, 10.2 etc.).

It should be noted that there are other methods of numbering the displacement stations, which may be equally acceptable.

Waterlines are identified as follows:

- Waterlines should be spaced as required and identified by their height above the baseline.
- The baseline should be defined as the top-side of keel. In the case of a raked keel the baseline is parallel to the design waterline and midway between the height above base at the *AP* and *FP* stations.

Moulded dimensions:

Ship lines are normally drawn to moulded dimensions and model hulls should also be constructed to moulded dimensions.

Manufacturing tolerances


Model hull tolerances for breadth (y) and depth (z) should be within ± 1.0 mm. The tolerance for model length should be within $\pm 0.05\%L_{PP}$ or ± 1.0 mm whichever is the larger.

For multihull models, the tolerances for transverse and longitudinal spacing of hulls should be within $\pm 0.05\%L_{PP}$ or 1.0 mm whichever is the larger.

Openings in the hull should be manufactured to within ± 1.0 mm. If lateral thrust units are modelled to include the associated power loss, then these can be represented using a cavity that does not go through to the other side. If thrust units are included to assess manoeuvring capability then both the thrust to be modelled and the expanded blade area ratio (A_E/A_O) should be considered.

Stability over time

The dimensions of the hull model should not move outside the recommended manufacturing tolerances. It should be noted that the dimensions of wax models can change appreciably with changes in temperature. For example, a change of 5°C may alter the length of a model by about 0.15% (10 mm for a 7 m model). The model documentation should include any

	ITTC – Recommended Procedures and Guidelines	7.5-01 -01-01 Page 5 of 9	
	Ship Models	Effective Date 2017	Revision 04

changes in dimensions, which may have arisen from this source.

3.1.2 Propeller model

Manufacturing tolerances (for self-propulsion and open water tests):

Propellers having diameter (D) typically from 150 mm to 300 mm should be finished to the following tolerances:

Diameter (D)	± 0.10 mm
Thickness (t)	± 0.10 mm
Chord length (c)	± 0.20 mm
Mean pitch at each radius (P/D):	$\pm 0.5\%$ of design value.

Special attention should be paid to the shaping accuracy near the leading and trailing edges of the blade section and to the thickness distributions. The propeller will normally be completed to a polished finish. The use of CAD/CAM processes further enhances the facility to achieve such tolerances.

The manufacture of model ducts, vane wheels and pre and post swirl vanes should follow the tolerances recommended above for model propellers used in self-propulsion and open water tests.

Gaps

The gap between the aft side of the model bossing and the fore side of the propeller boss should be the minimum required to allow sufficient forward movement of the propeller when calibrating the thrust dynamometer but should not exceed 2 mm with the propeller in its design position. Rope guards across the gap should not be produced at model scale.

Propeller / hull clearances

Propeller/hull aperture clearances should have tolerances within ± 1.0 mm and a maximum axial propeller movement of 1.5 mm. These tolerances should provide propeller clearances with less than 1.0% D error.

3.1.3 Appendages

Appendages in this context refer to items such as external shaft brackets, open propeller shafts, bossings, the struts and pods of podded propulsors, bilge keels, roll fins and rudders.

Appendages should be built to the full external shape as designed.

The manufacturing tolerances of appendages should be within ± 0.2 mm.

Surface finish should be at least as good as that recommended for the hull model.


Appendages should be located within ± 0.5 mm of their design position.

3.2 Turbulence Stimulation

The reasons that turbulence stimulation is applied to a ship model are (in decreasing order of importance): (1) ensure that the flow regime at model scale is equivalent to that at full scale, (2) that the model scale flow is constant and hence repeatable across the design Froude number and between repeat tests, and (3) that a known scaling approach can be applied.

3.2.1 Hull

The model should be fitted with a recognised turbulence stimulator, which should be clearly described in the model documentation and the report on the experiments. Given the variation in model geometry the turbulence stimulator device should be chosen following consideration

	ITTC – Recommended Procedures and Guidelines	7.5-01 -01-01 Page 6 of 9	
	Ship Models	Effective Date 2017	Revision 04

of its effectiveness and convenience for the individual purpose. Three different kind of turbulence stimulators are currently in common use for maritime applications: studs, sand strips, and trip wires.

Typical combinations of model/appendage length and Froude number where most of the model would remain in the laminar flow regime are identified in Figure 1. Special care should be taken when selecting turbulence stimulator devices for these cases.

A review of progress into the mechanisms of laminar-turbulent boundary layer transition and appropriate selection of devices for turbulence stimulation is given in Resistance Committee report for the 26th ITTC (2011) and 28th ITTC (2017). The conclusions from these reviews are summarised in the procedures provided here.

Studs used for turbulence stimulation will be typically between 1.6 and 3.2 mm in diameter, 0.5 to 3.0 mm high and spaced between 12 and 25 mm apart. Figure 2, from Hughes and Allan (1951) and NPL Report 10/59 (1960), gives guidelines for the dimensions of studs and the location of the studs as turbulence stimulators on a raked stem of conventional type.

Wires used for turbulence stimulation will be typically between 0.5 mm and 1.0 mm diameter, depending on position and model speed, and be situated about 5% L_{PP} aft of the *FP*.

Sand strips used for turbulence stimulation will typically comprise backing strips/adhesive of 5 mm to 10 mm width covered with sharp edged sand with grain size around 0.50 mm, with its leading edge situated about 5% L_{PP} aft of the *FP*.

Sand strips are the preferred method of turbulence stimulation for long slender hulls, such as high speed catamarans.

Wires are often preferred over sand strips for convenience, due to their dimensional accuracy and ease of fitting. Some sand strips have been found to be vulnerable to deterioration during testing.

A bulbous bow will additionally have turbulence stimulators situated typically at $\frac{1}{3}$ of the bulb length from its fore end.

In the case of bulbous bows with S shaped waterlines the turbulence stimulator should be applied in a position shortly before a positive pressure gradient can be expected. Care has to be taken that the size and number of turbulence stimulation devices used does not fundamentally alter the bow wave and thus the progressive accumulation of pressure and skin friction resistance along the hull.

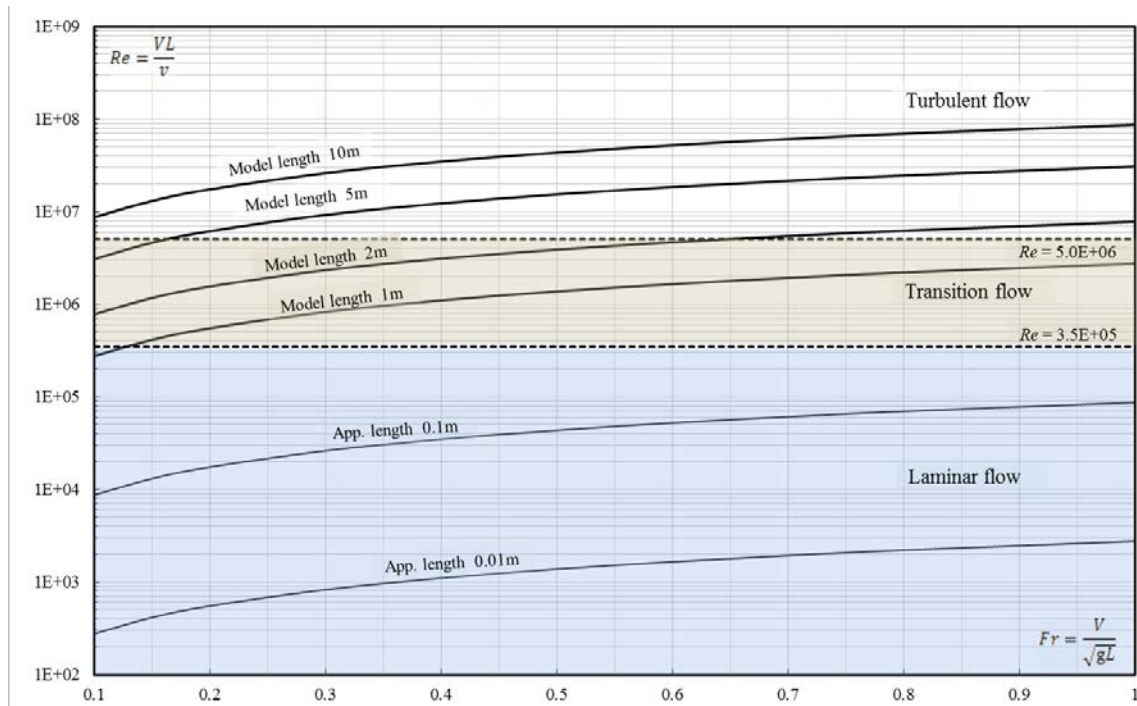


Figure 1 Contour plot of length-based Re for a range of model/appendage lengths and Froude numbers. This is an example for flow regime estimation for typical model/appendage length without turbulence stimulation devices ($\nu = 1.1386 \times 10^{-6} \text{ m}^2/\text{s}$ for 15°C fresh water, $g = 9.8067 \text{ m/s}^2$)

3.2.2 Appendages

Turbulence stimulation should be applied to appendages when laminar flow over the appendage is likely. The approach for the selection of appropriate turbulence stimulation devices for appendages is as follows:

1. For each appendage component classify the device as bluff, faired or lifting.
2. Evaluate the expected Reynolds number for the range of Froude numbers to be tested.
3. Select a suitable turbulence stimulator device that is of appropriate size and spacing
4. For those devices where there is a risk of flow separation or which will remain mostly laminar, examine what is the chosen strategy to mitigate the altered flow regime. For example, by using a rough surfaced appendage or altering its section profile.
5. Conduct progressive component stripping process, progressively adding appendages starting with the furthest forward.
6. Evaluate the resistance increase due to each component.
7. Scale the correct resistance contribution.

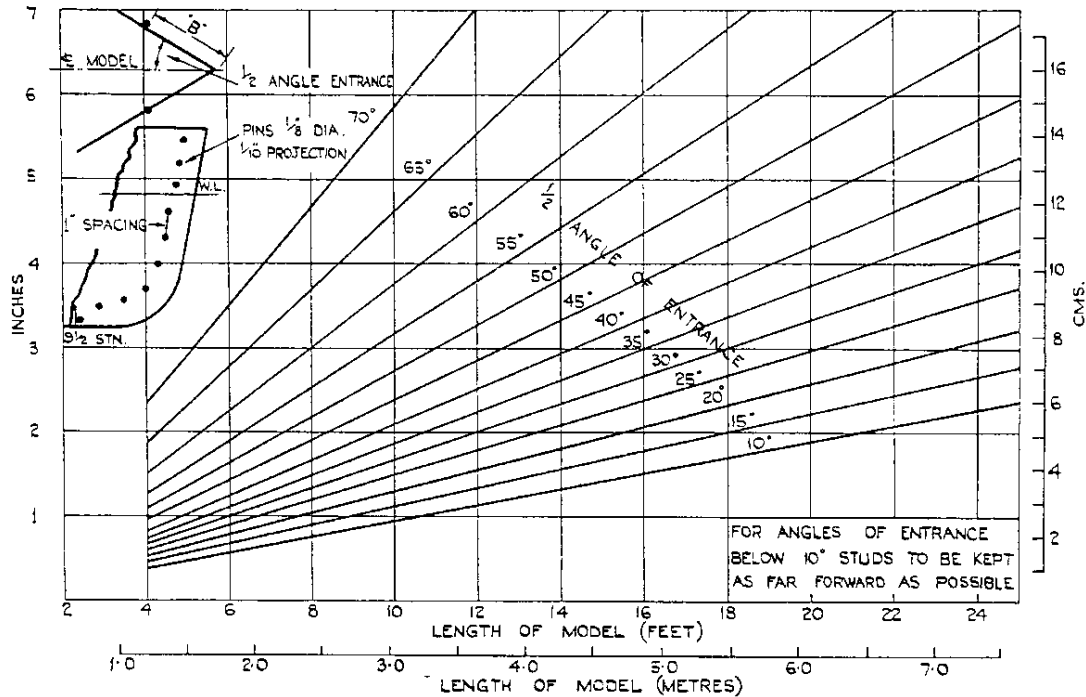


Figure 2 Location of studs as turbulence stimulators (Hughes and Allan, 1951)

3.2.3 Propeller

Turbulence stimulation will not normally be applied to propellers used in self-propulsion and open water tests. There is however evidence that turbulence stimulation may be necessary on model propellers used in cavitation tests.

3.3 Preparation for Model Testing


Before ballasting the model, careful checks of the model dimensions should be made.

3.3.1 Ballasting and trimming (for resistance and self-propulsion tests)

The model should be loaded to give the correct volume displacement at model scale. This typically involves calculation of the full-scale volume displacement from knowledge of the

full-scale weight and the appropriate water density; scaling of the volume displacement to model scale using the adopted scale factor; calculation of the model-scale weight using the water density appropriate for the tank; finally ballasting of the model to the calculated weight. The model weight should be correct to within 0.2% of the correct calculated weight displacement. Where practical, the model should be weighed in air using a calibrated scale.

The trim of the model should be such that the errors in draught, if any, from the design figure are the same at the forward and after perpendiculars. The model will normally be tested without heel. The mean of the four draughts, fore perpendicular, after perpendicular, port side amidships and starboard side amidships, should not differ from the designed figure by more than 2.0mm or 0.05% L_{PP} , whichever is the less.

	ITTC – Recommended Procedures and Guidelines	7.5-01 -01-01 Page 9 of 9	
	Ship Models	Effective Date 2017	Revision 04

Hog or sag deformation should not exceed acceptable tolerances, typically not > 2.0 mm or 0.05% L_{PP} , whichever is less.

For older models being re-tested, the choice of an acceptable tolerance may depend on resistance benchmark re-tests.

3.3.2 Wax models

The following applies to models manufactured predominantly out of wax, not wax-wood composite models.

Before running, wax models should be left fully sunk in the water, preferably for 36 hours and not less than 12 hours. On re-floating, the entire surface should be cleaned in the tank water with a sponge or soft brush, particular care being taken to remove all air bubbles and slime from the surface. If the model has been in the water for some weeks and has become encrusted with a crystalline deposit it should be re-scraped and re-soaked, not merely sponged.

3.4 Documentation

The particulars of the model(s) should be collated in a report and/or included in a test report, and should contain at least the following information:

Hull Model:

Identification (model number or similar)

Materials of construction

Principal dimensions

Length between perpendiculars (L_{PP})

Length of waterline (L_{WL})

Breadth (B)

Draught (T)

For multihull vessels, longitudinal and transverse hull spacing

Design displacement (Δ) (kg, fresh water)

Hydrostatics, including water plane area and wetted surface area

Details of turbulence stimulation

Details of appendages

Propeller Model:

Identification (model number or similar)

Materials of construction

Principal dimensions

Diameter

Pitch-diameter ratio (P/D)

Expanded blade area ratio (A_E/A_0)

Thickness ratio (t/D)

Hub/boss diameter (d_h)

4. REFERENCES

Hughes, G. and Allan, J.F., 1951, Turbulence Stimulation on Ship Models. *Trans. SNAME*, Vol.59, 1951.

ITTC 2011, Report of the 26th ITTC Resistance Committee.

ITTC 2017, Report of the 28th ITTC Resistance Committee.

Liu, P., Bose, N., Frost, R., Macfarlane, G.J., Lienthal, T. and Penesis, I., (2015), Model Testing and Performance Comparison of Plastic and Metal Tidal Turbine Rotors. *Applied Ocean Research*, 53, pp116-124.

National Physical Laboratory, 1960, NPL Report SHR 10/59 Revised. Standard Procedure for Resistance and Propulsion Experiments with Ship Models. February, 1960.